



www.tuskstore.com

Shelford Design Ltd

Unit 7, Riverside Workshops

Riverside Way, Seaton, Devon EX12 2UE

T: 07767 484 465 E: sales@tuskstore.com

Also available (for further details see website):


- TUSK Bull Rack bike storage
- TUSK Hook 'n' Hang vertical bike storage
- TUSK Excel high security anchors
- TUSK Modular bike storage systems
- TUSK Multihanger overhead storage

Product Information Sheet
SECURITY ANCHOR:
EXCEL AND EXCEL PARKING

ARCHITECTS, PLANNERS AND INSTALLERS NOTES

Product
Information
Sheet

16

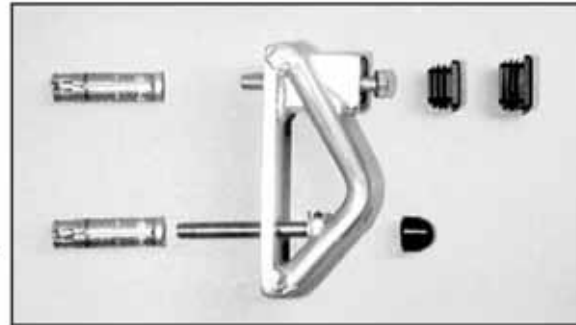

Installation:

1. Locate the Excel at a suitable height and orientation, mark the 2 hole locations, drill a 14mm diameter hole x 55mm deep with a suitable masonry drill at each location into sound masonry or concrete and clean out the holes.
2. **Caution: Always wear suitable eye protection when drilling and cleaning out holes etc.**
3. Finger tighten a bolt into the shield anchor prior to inserting into the brickwork flush to wall surface. Give 2-3 turns of the bolt to expand the shield anchor in the wall then remove the bolt.
4. Attach the Excel with 2 x M8 x 60mm bolts with a washer under each bolt head and fully tighten. Recommended torque is 25 Nm.

Tip: To locate the bolt in the base plate under the crossover the bars insert into hole at a 45 degree angle. Use a box or standard socket to tighten bolt in square section and a thin open ended spanner for the other,

5. When fitting Excel Parking with the base plate, follow the simple instructions that come with the base plate in conjunction with these instructions.

6. Add Superglue to the ribbing and base of the smaller square end plug, insert into the square section and gently tap to the bottom of the square section. Bond the plastic cap over the head of the other bolt head.

7. Apply Superglue or similar to the ribbing of the larger outer cap and tap into position.

Security:

- For maximum security run a security cable through the Excel then figure of eight through the wheels and around the frame to safeguard the security of the complete bike. the Excel will also take a D-Lock up to 30mm diameter.
- Anchor bolts are tamper proof and heavy duty with a combined pull-out load of 6500lb.

See website for full terms and conditions and further details

www.tuskstore.com