


Product information Sheet TUSK Multi-Hangers Specification

31

Locations for use: Residential, Workplace and employee bike parking, Garages, Basement bike storage, in fact anywhere there is a suitable overhead joist.

Items required: Multi-Hanger 4 or Multi-Hanger 6 or any suitable combination.

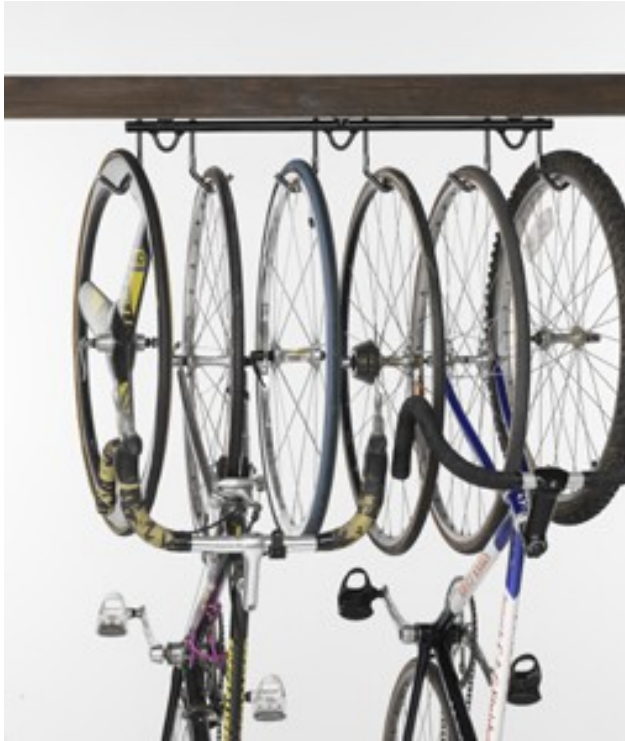

Multi-Hanger 4 Specification:

- One piece MIG welded steel assembly
- 5 year warranty
- Black corrosion proof finish Plascoat PPA 571
- Security loops provision for locking
- 4 x M6 High Load Coach Screws & caps included
- Sheathed Hooks for wheel protection
- Overall Dims. 4 hooks @ 155mm crs. L=530mm
Fixing crs: 1 x 300mm pitch x 34mm crs

Multi-Hanger 6 Specification:

- One piece MIG welded steel assembly
- 5 year warranty
- Black corrosion proof finish Plascoat PPA 571
- Security loops provision for locking
- 6 x M6 High Load Coach Screws & caps included
- Sheathed Hooks for wheel protection
- Overall Dims. 6 hooks @ 155mm crs. L=840mm
Fixing crs: 2 x 300mm pitch x 34mm crs

General: Multi-Hangers are attached to the underside of any 50mm wide ceiling, roof, garage joist by fixings provided. Racks any bike vertically held by the front wheel, 20mm to 65mm wide. No accidental dislodging. No buckled wheels. Maximum capacity for the Multi-Hanger 4 is 2 bikes plus 2 separate wheels and for the Multi-Hanger 6 is 3 bikes and 3 separate wheels or any combination. Also suitable for tidy storage of garden tools and equipment.

See website for full Terms and Conditions and further details.

www.tuskstore.com