


### Product information Sheet

**TUSK** MAXI Bike Park  
Single and Double Row Kits  
**Specification**



**Locations for use:** Residential, Workplace and employee bike parking, Garages, Basement bike storage, in fact anywhere there is a suitable mounting surface.  
**Items required:** Select from: Maxi 3, 4 or 5 Single Row or, Maxi 6, 8 or 10

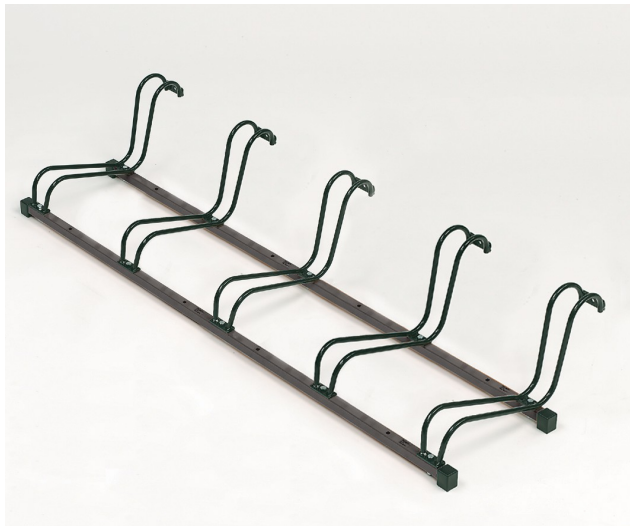

Single Row:	Width	Length	* Overall space required
<b>Maxi 3</b>	52cm	85cm	W= 185cm x L=145cm
<b>Maxi 4</b>	52cm	121cm	W= 185cm x L=181cm
<b>Maxi 5</b>	52cm	157cm	W= 185cm x L=217cm

\*Note: Overall space required based on average cycle length is 1.85M and 30cm required for handlebar clearance each end.

Double Row:	Width	Length	Overall Space required
<b>Maxi 3+3</b>	107cm	85cm	W=395cm x L=145cm
<b>Maxi 4+4</b>	107cm	121cm	W=395cm x L=181cm
<b>Maxi 5+5</b>	107cm	157cm	W=395cm x L=217cm

\*Note: Overall space required based on average cycle length is 1.85M and 30cm required for handlebar clearance each end.

**General:** **Installation:** Single row bolted to wall and floor. Double row (Back to Back) bolted to floor only. **Finish:** Corrosion proof **Black PPA571.** **Security:** Hafren Armour Ring Security fixings throughout plus drill through Floor and Wall fixing bolts included. Alternate front / rear wheel parking @ 36cm centres. Wheels up to 50mm wide. All kits are flat packed for transport. Simple assembly. 1metre clear unobstructed walkway recommended between rows when cycle parks are in full use.

See website for full Terms and Conditions and further details.

[www.tuskstore.com](http://www.tuskstore.com)