


Detail Sheet 33

MAXI BIKE PARK SPECIFICATIONS

Maxi 3, Maxi 4

SHELFORD DESIGN LTD

Unit 10 Blagdons Storage 250 Embankment Road Plymouth Devon PL4 9JH

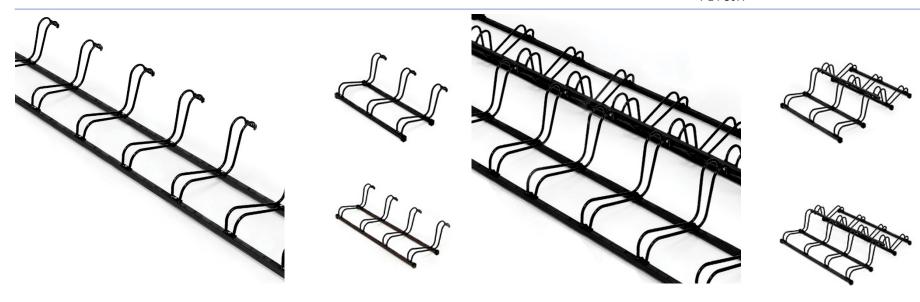

Single Row:WidthLengthOverall space requiredMaxi 352cm85cmW= 185cm x L=145cmMaxi 452cm121cmW= 185cm x L=181cm

Double Row: Width
Maxi 3+3Length
85cmOverall Space required
W=395cm x L=145cmMaxi 4+4107cm121cmW=395cm x L=181cm

*Note: Overall space required based on average cycle length

*Note: Overall space required based on average cycle length is 1.85M and 30cm required for handlebar clearance each end.

Adding additional modules:

The Maxi Bike Parks can be expanded by adding additional Maxi 3 or Maxi 4 modules and connecting them with the **Combi Bar**.

No additional fixings are needed. Simply insert the Combi Bar between the two modules and secure in place using the existing fixings.

There is no limit to the number of modules that can be joined together in this manner and undulations on the ground are catered for due to the modular design.



General:

Installation:

Single row bolted to wall and floor.

Double row (Back to Back) bolted to floor only.

Finish: Corrosion proof Black PPA571.

Security: Hafren Armour Ring Security fixings throughout plus drill through Floor and Wall fixing bolts included.

Additional:

Alternate front / rear wheel parking @ 36cm centres.

Wheels up to 50mm wide.

All kits are flat packed for transport.

Simple assembly.

1 metre clear unobstructed walkway recommended between rows when cycle parks are in full use.