






Detail Sheet **36**

HOOK N HANG INSTALLATION

SHELFORD DESIGN LTD

Unit 10 Blagdons Storage  
250 Embankment Road  
Plymouth  
Devon  
PL4 9JH

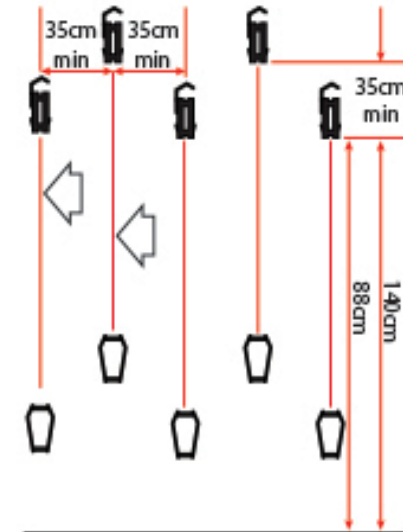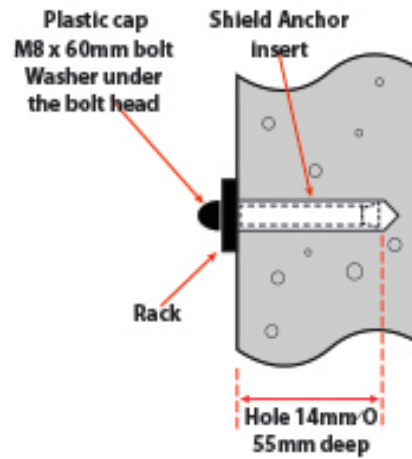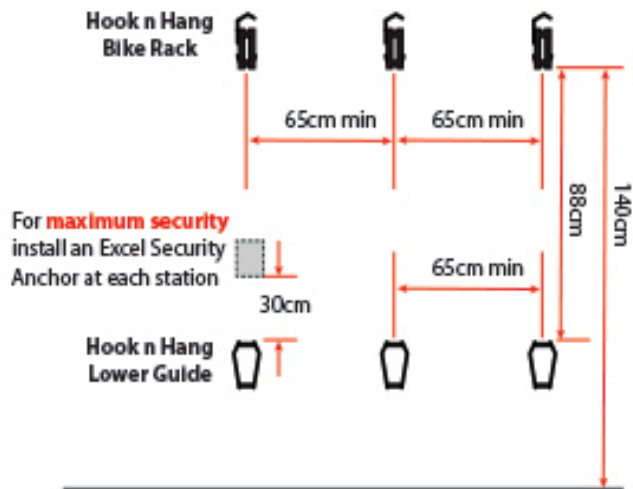

**No. of Racks**      **3**      **4**      **5**      **6**      **7**      **8**      **9**      **10**

TUSK is a registered Trade Mark of Shelford Design Ltd. Company Reg No: 1905093 VAT Registered Number: 393261640  
S QUICK: Managing Director

Telephone support: +44 (0) 7767 484465  
Email support: sales@tuskstore.com

**Standard Single Row:  
@ 65cm level pitch**

Wall length (m)    1.90    2.55    3.20    3.85    4.50    5.15    5.80    6.45    etc

**High Density, staggered:  
@ 35cm pitch & 35cm vertical stagger**

1.65    2.00    2.35    2.70    3.05    3.40    3.75    etc

**Useful Installation Hints:**

1. Remember, an average bike is 1.85m long & 1.25M high to top of saddle. ie. Bike will stick out from wall when racked by 1.25M.
2. Allow 1 metre clear aisle access between racked bikes.
3. CAUTION: Always wear suitable eye protection when drilling and cleaning out shield anchor holes.
4. Tools required: Drill; 14mm Masonry drill; Hammer; M8 socket spanner; Tape measure and Spirit level.

**General:**

Racks any bike vertically held by the front wheel which can be any size up to 65mm wide.

No accidental dislodging.

No buckled wheels.

No needless pavement clutter when not in use - maximum protrusion is only 130mm when not in use.

Built in security provision to securely lock both wheels and frame to the upper and lower racks with suitable cable lock.